



# Industrial Battery Products Catalog

## CYCLE AGM LEAD ACID BATTERY

# UXL-NNTS

**2,500 Cycles at DOD50%**  
**2V Type**  
**300Ah – 500Ah**



## CYCLE AGM LEAD ACID BATTERY

# UXF150-12C


**1,500 Cycles at DOD50%**  
**12V150Ah**  
**Front Terminal**



## SUPER LONG LIFE AGM LEAD ACID BATTERY

# UXL

**15 Years Design Life**  
**2V Type**  
**200Ah – 1000Ah**

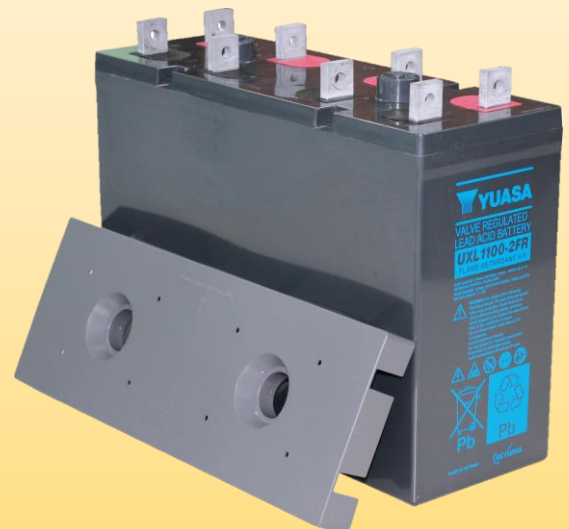

# UXL-NNTS Series



## CYCLE AGM LEAD ACID BATTERY





- ✓ 2,500 cycles at DOD50%
- ✓ 10 Years Long Design Life
- ✓ AGM Technology
- ✓ UL94 V-0 Grade Container
- ✓ UL Listed Product
- ✓ Application : Telecom, Off/Poor Grid



MH64763



TYPE NAME	Voltage (V)	Capacity (10HR)	Terminal	Approx. Weight (kg)	Dimension (mm)		
					L	W	H
UXL330-2NNTS	2	300	N terminal (M10)	18.5	170	150	339
UXL550-2NNTS	2	500	N terminal (M10)	29.5	171	241	339

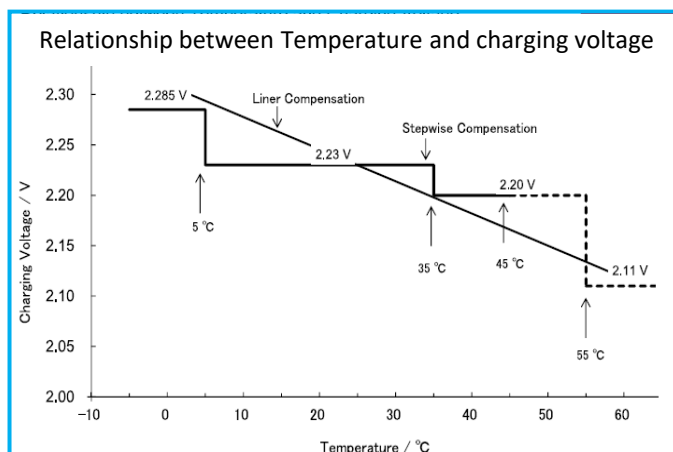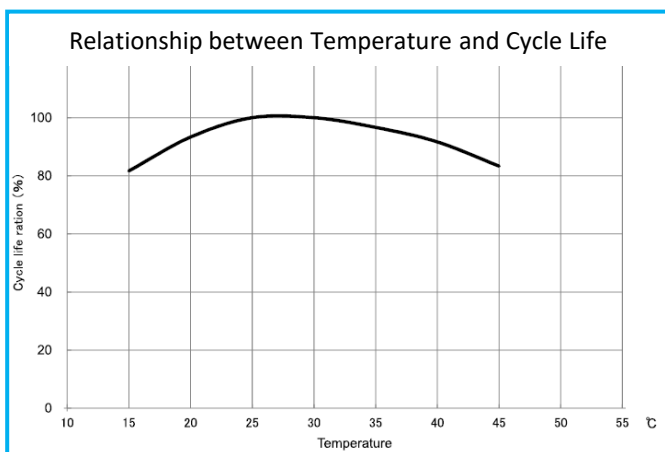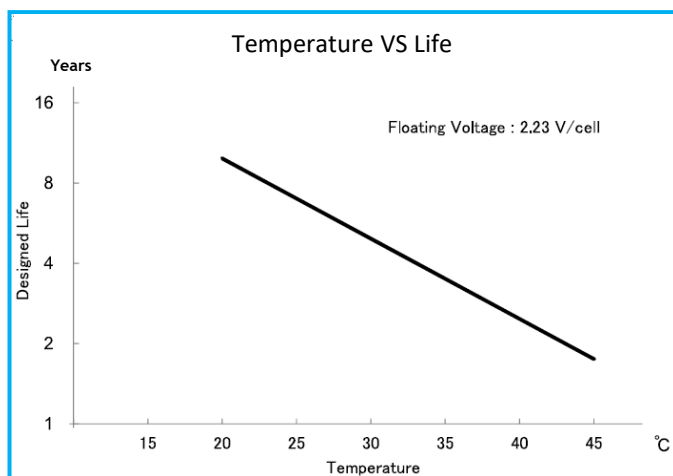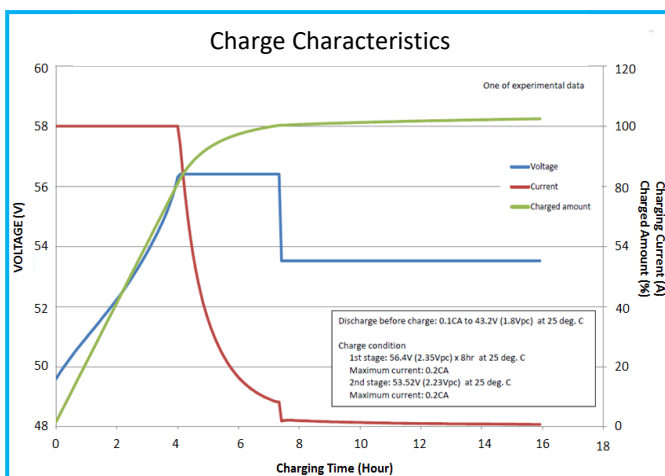

# UXF Series



## CYCLE AGM LEAD ACID BATTERY

- ✓ 1,500 cycles at DOD50%
- ✓ 12 Years Long Design Life
- ✓ 12V Block Type
- ✓ UL94 V-0 Grade Container
- ✓ UL Listed Product
- ✓ Front Access Availability
- ✓ Application : Solar, Off/Poor Grid



MH64763



TYPE NAME	Voltage (V)	Capacity (10HR)	Terminal	Approx. Weight (kg)	Dimension (mm)		
					L	W	H
UXF150-12C	12	150	N terminal (M8)	53.5	528	122	308



F.V.	Unit	Discharge Time										
		3 min	7 min	10 min	15 min	30 min	1 h	2 h	3 h	5 h	8 h	10 h
1.80V	W	-	-	-	1815.6	1276.1	896.9	592.2	435.1	294.5	201.8	172.4
	A	-	-	-	168.5	122.1	86.0	52.0	38.0	25.4	17.5	15.0
1.75V	W	-	-	-	2007.6	1408.8	911.9	600.7	440.7	298.7	205.4	174.9
	A	-	-	-	185.0	137.8	91.2	53.8	38.6	25.7	17.8	15.0
1.70V	W	1730	2780	3222	2219.9	1555.3	915.4	604.8	444.5	302.1	208.6	177.3
	A	155	256	-	211.9	141.0	93.7	54.3	39.3	26.1	18.0	15.2
1.67V	W	-	-	-	2290.3	1603.8	921.0	608.5	447.3	303.3	209.7	178.2
	A	-	-	-	218.6	144.1	95.0	55.0	39.5	26.2	18.0	15.3
1.65V	W	-	-	-	2337.3	1636.2	924.7	611.0	449.2	304.5	210.6	178.8
	A	-	-	-	223.1	149.1	96.3	55.2	39.6	26.2	18.1	15.3

# UXL Series



## SUPER LONG LIFE AGM LEAD ACID BATTERY

- ✓ 15 Years Long Design Life
- ✓ AGM Technology
- ✓ UL94 V-0 Grade Container
- ✓ UL Listed Product
- ✓ Application : UPS, Telecom, Back up



MH64763

TYPE NAME	Voltage (V)	Capacity (10HR)	Terminal	Approx. Weight (kg)	Dimension (mm)		
					L	W	H
UXL220-2FR	2	200	L Terminal (Φ11)	15.1	170	106	362
UXL330-2FR	2	300	L Terminal (Φ11)	21.6	170	150	362
UXL550-2FR	2	500	L Terminal (Φ11)	35.9	171	241	362
UXL550-2FRi	2	500	N Terminal (M10)	34.8	171	241	339
UXL1100-2FR	2	1000	L Terminal (Φ11)	71.1	471	171	362
UXL1100-2FRi	2	1000	N Terminal (M10)	69.2	471	171	339

